



CLOSETMAID®

don't settle for less...

**ask for ClosetMaid products by name
engineered to last a lifetime!**

general specs

Vinyl Coated, Steel Rod, Ventilated Shelving and Storage Systems manufactured by ClosetMaid, Ocala, Florida.

wire shelving physical properties

Materials	Grade C - 1006 basic cold drawn steel wire
Tensile strength	Over 100,000 PSI (average)
Cross dec spacing	15mm to 25mm increments
Coating	Proprietary polyvinyl chloride formula resin (PVC)
Vinyl thickness	0.23 - 0.27mm (fluidised bed process)
Mounting Hardware	Components shall provide for shelving installation to drywall without requiring mounting to conceal wall structural members. Support brackets shall be required for 900mm span (600mm recommended for areas designed for heavy use).

coating specifications

ClosetMaid heavy duty vinyl coating won't chip or split. It is a propriety Polyvinyl Chloride Resin (PVC) with an exclusive mixture of ingredients, including plasticisers, stabilisers, pigments and other additives, none of which are listed as hazardous materials on OSHA 29CFR1910.1017.

ClosetMaid GlideKote is an exclusive, high performance hybrid polyester that is exceptionally strong and durable. GlideKote has an additive that creates a very low coefficient of friction adding years of performance and ease in sliding.



ClosetMaid patented plastic components are manufactured to achieve high performance standards and meet rigid material requirements. Nylon is specified for consistent performance.




0800 507 744
www.wardrobeworld.co.nz

Contact your local dealer:

load capacity charts

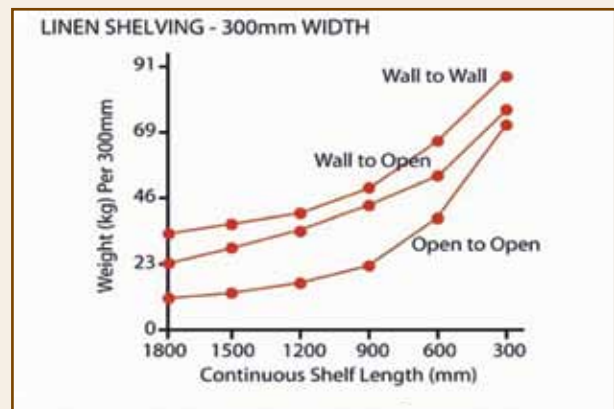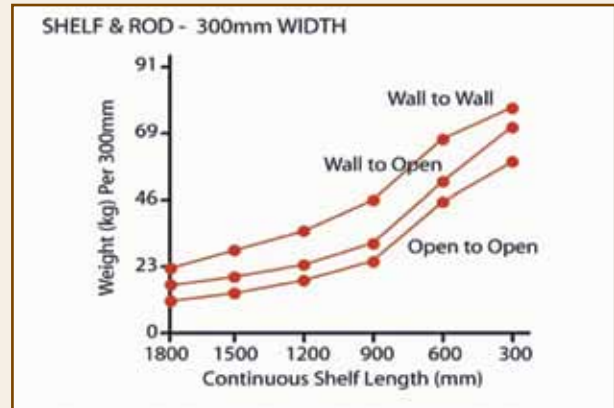

fixing

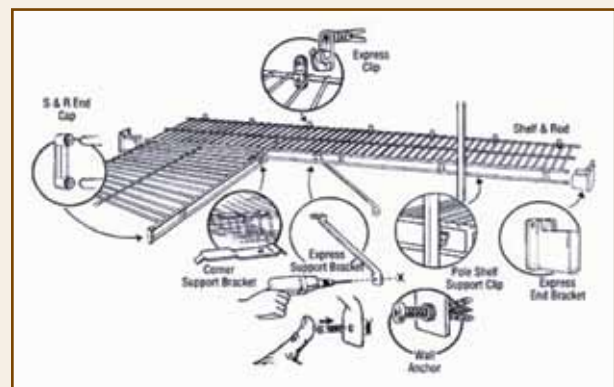

WardrobeWorld services

Your local WardrobeWorld dealer will provide you with a no-obligation design and quote, fully installed or supply only. Consultants will be happy to meet you on-site, or simply send in your plans or wardrobe measurements.